OREGON PLL (OR)



A high performance fluorescent fitting with a range of sensor options.

APPLICATIONS

- Industry and warehouses
- Mounting heights 5+m

SPECIFICATION


- For PLL 55W & 80W, 4 & 6 lamps
- Supplied excluding lamps
- European brand ENEC control gear

CONSTRUCTION

- Robust steel body
- White powder coated textured finish
- Miro 4 reflectors for maximum efficiency
- Suitable for installation on chain, lighting trunking and BESA fixings
- Supplied with detachable mounting bracket (pictures above)

OPTIONS

- **Sensors.** Add suffix PIR, PIRD or MLL. See page 160 for details.
- **Emergency.** Maintained 3 hours available. Add suffix M3.
- **Dimming.** Add suffix 1-10, DSI, DA, SD or CF.
- **Dual switching.** Suffix DS.
- **Modular wiring.** Available with 4-pole panel mount connector. Add suffix MO2.
- **High-rack reflector.** Add suffix HR.

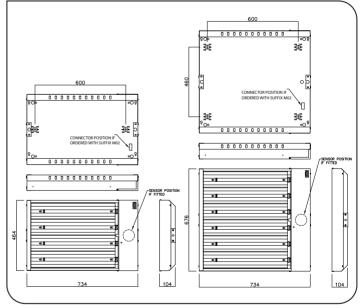

ORDER CODE	DESCRIPTION
NOR455/PLL	OREGON 4X55WPLL
NOR480/PLL	OREGON 4X80WPLL
NOR655/PLL	OREGON 6X55WPLL
NOR680/PLL	OREGON 6X80WPLL

ATTACHMENTS

ORDER CODE	DESCRIPTION
NOR/COVER/PC/455/PLL	OREGON COVER POLYCARBONATE 4X55-80W PLL
NOR/COVER/PC/655/PLL	OREGON COVER POLYCARBONATE 6X55-80W PLL
NOR/WG/455/PLL	OREGON WIRE GUARD 4X55-80W PLL
NOR/WG/655/PLL	OREGON WIRE GUARD 6X55-80W PLL

