


(OR) **OREGON T5**



Rear of Oregon with connector fitted

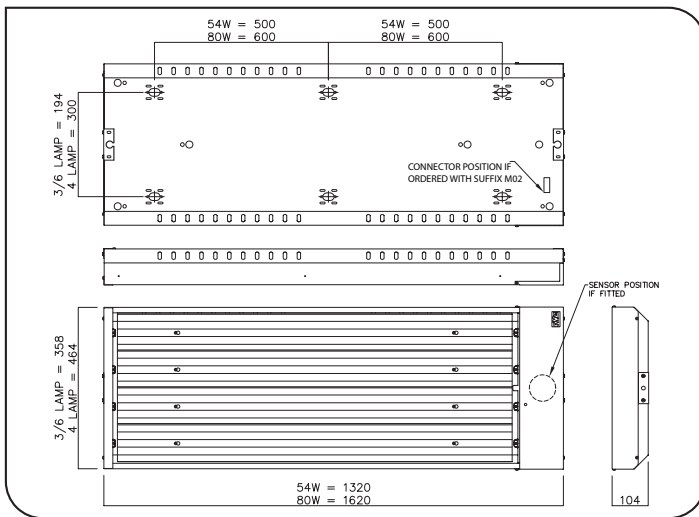

A high performance fluorescent fitting with many sensor options.

APPLICATIONS

- Industry and warehouses
- Mounting heights 5+m

SPECIFICATION

- For T5 54W & 80W, 3, 4 and 6 lamps
- Supplied excluding lamps
- European brand ENEC control gear

CONSTRUCTION

- Robust steel body
- White powder coated textured finish
- Miro 4 reflectors for maximum efficiency
- Suitable for installation on chain, lighting trunking and BESA fixings
- Supplied with detachable mounting bracket (pictures above)

OPTIONS

- **Sensors.** Add suffix PIR, PIRD or MLL. See page 160 for details.
- **Emergency.** Maintained 3 hours available. Add suffix M3.
- **Dimming.** Add suffix 1-10, DSI, DA, SD or CF.
- **Dual switching.** Add suffix DS.
- **Modular wiring.** Available with 4-pole panel mount connector. Add suffix M02.
- **High-rack reflector.** Add suffix HR.

ORDER CODE	DESCRIPTION
NOR354/T5	OREGON 3X54WT5
NOR454/T5	OREGON 4X54WT5
NOR654/T5	OREGON 6X54WT5
NOR380/T5	OREGON 3X80WT5
NOR480/T5	OREGON 4X80WT5
NOR680/T5	OREGON 6X80WT5

ATTACHMENTS

ORDER CODE	DESCRIPTION
NOR/COVER/PC/354-654/T5	OREGON COVER POLYCARBONATE 3/6X54W T5
NOR/COVER/PC/454/T5	OREGON COVER POLYCARBONATE 4X54W T5
NOR/COVER/PC/380-680/T5	OREGON COVER POLYCARBONATE 3/6X80W T5
NOR/COVER/PC/480/T5	OREGON COVER POLYCARBONATE 4X80W T5
NOR/WG/454/T5	OREGON WIRE GUARD 4X54W T5
NOR/WG/480/T5	OREGON WIRE GUARD 4X80W T5