


Object :  
 Installation :  
 Project number :  
 Date : 14.06.2010



**Luminaire data**

**NVC LIGHTING, ILLINOIS 2X40W PLL (NIL240PLL)**

**LDC**

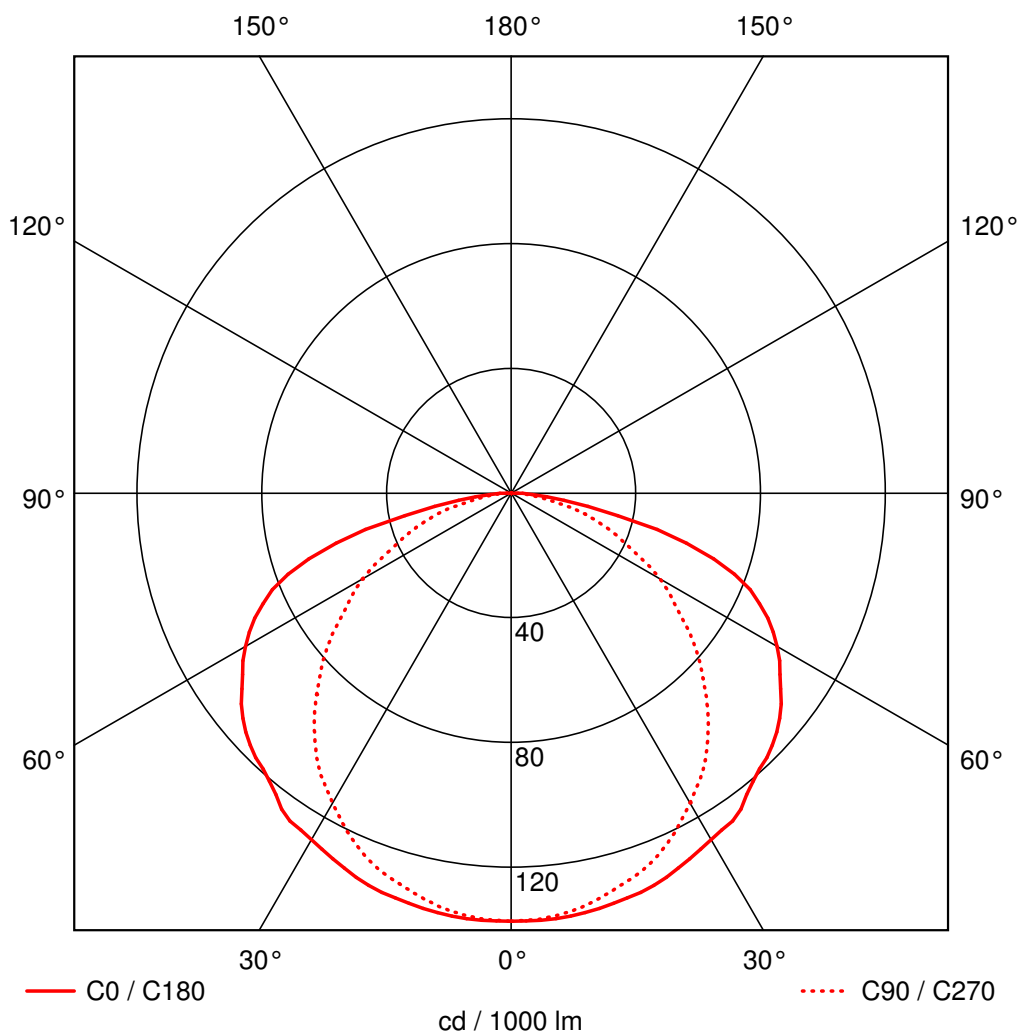

	C0	C90	C180
0°	137	137	137
5°	137	137	137
10°	137	134	137
15°	135	131	135
20°	134	127	134
25°	131	122	131
30°	128	115	128
35°	126	108	126
40°	121	98	121
45°	117	88	117
50°	112	77	112
55°	105	65	105
60°	98	55	98
65°	89	42	89
70°	76	33	76
75°	53	23	53
80°	25	11	25
85°	9	5	9
90°	1	1	1
	cd / 1000 lm		

Manufacturer : NVC LIGHTING  
 Order number : NIL240PLL  
 Luminaire name : ILLINOIS 2X40W PLL  
 Equipment : 2 x 40watt Dulux L 0 W / 3500 lm  
 Dimensions : L 600 mm x W 600 mm x H 5 mm  
 File name : NIL240PLL0609.LDT

Efficiency factor : 46.1% (A30)  
 Light distribution : sym. to C0-C180 / C90-C270  
 Beam Angle : 143.3° C0-C180  
 107.1° C90-C270

Object :  
Installation :  
Project number :  
Date : 14.06.2010



## NVC LIGHTING, ILLINOIS 2X40W PLL (NIL240PLL)

### Data sheet

---

**Manufacturer: NVC LIGHTING**

**NIL240PLL ILLINOIS 2X40W PLL**

#### Luminaire data

Luminaires efficiency : 46.1% (A30)  
                                  ↓ 99.9% ↑ 0.1%

Control gear :  
System power : 120 W  
Length : 600 mm  
Width : 600 mm  
Height : 5 mm

#### Equipped with

Number of : 2  
Designation : 40watt Dulux L  
Power : 0 W  
Colour :  
Luminous flux : 3500 lm

