

BISMARCK (BI)



Supplied complete with side-arm support brackets



Available with micro-wave occupancy sensor fitted internally



IP54 rated recessed modular fitting for T5 and T8 lamps.

APPLICATIONS

- Health centres and hospitals
- Food preparation areas
- Laboratories and clean rooms

SPECIFICATION


- For T5 and T8 lamps. Supplied excluding lamps
- European brand ENEC control gear
- For 15-24mm exposed T, plasterboard and some concealed grid ceilings

CONSTRUCTION

- Robust steel body
- White semi-gloss powder coated finish
- IP54 rated to the front of the fitting

OPTIONS

- **Sensors.** Available with micro-wave sensor fitted behind front panel. Add suffix MW.
- **Emergency.** Maintained 3 hours available on all versions. Add suffix M3.
- **Prismatic panels.** M3 versions all supplied with TP(a) panels. Standard versions supplied with TP(b) panels. TP(a) panels available. Use suffix TPA.
- **Dimming.** Add suffix 1-10, DSI, DA, SD or CF as required.

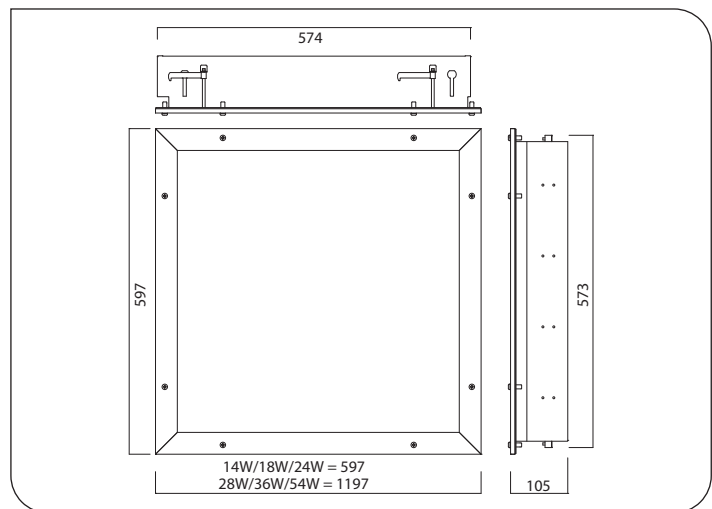

T5

ORDER CODE	DESCRIPTION
NBI314/T5/TPB	BISMARCK 3X14W T5 REC MOD IP54 TPB PANEL
NBI414/T5/TPB	BISMARCK 4X14W T5 REC MOD IP54 TPB PANEL
NBI324/T5/TPB	BISMARCK 3X24W T5 REC MOD IP54 TPB PANEL
NBI424/T5/TPB	BISMARCK 4X24W T5 REC MOD IP54 TPB PANEL
NBI328/T5/TPB	BISMARCK 3X28W T5 REC MOD IP54 TPB PANEL
NBI428/T5/TPB	BISMARCK 4X28W T5 REC MOD IP54 TPB PANEL
NBI354/T5/TPB	BISMARCK 3X54W T5 REC MOD IP54 TPB PANEL
NBI454/T5/TPB	BISMARCK 4X54W T5 REC MOD IP54 TPB PANEL

T8

ORDER CODE	DESCRIPTION
NBI418/HF/TPB	BISMARCK 4X18W T8 HF REC MOD IP54 TPB PANEL
NBI436/HF/TPB	BISMARCK 4X36W T8 HF REC MOD IP54 TPB PANEL