



(IL) **ILLINOIS**



Lumafix Brackets - pack of 4

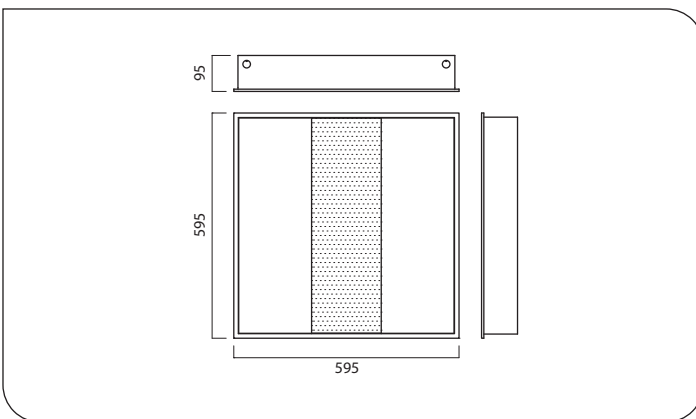

Recessed modular for T5 and PLL lamps, direct/indirect, with perforated steel diffuser.

APPLICATIONS

- Offices and conference rooms
- Reception areas

SPECIFICATION

- For T5 and PLL lamps. Supplied excluding lamps
- European brand ENEC control gear
- For 15-24mm exposed T ceilings and some pull-up installations.

CONSTRUCTION

- Robust steel body
- White semi-gloss powder coated finish
- Perforated steel diffuser

OPTIONS

- **Emergency.** Maintained 3 hours available on all versions. Suffix M3.
- **Dimming.** Add suffix 1-10, DSI, DA, SD or CF as required.
- **Pull-up installation.** For installation in 15-24mm exposed T ceilings. For plasterboard and other pull-up installations packs of 4 lumafix brackets are available as separate items.

ORDER CODE	DESCRIPTION
NIL224/T5	ILLINOIS 2X24WT5 REC MOD
NIL224/T5/M3	ILLINOIS 2X24WT5 REC MOD M3
NIL240/PLL	ILLINOIS 2X40WPLL REC MOD
NIL240/PLL/M3	ILLINOIS 2X40WPLL REC MOD M3
NIL255/PLL	ILLINOIS 2X55WPLL REC MOD
NIL255/PLL/M3	ILLINOIS 2X55WPLL REC MOD M3

SPARES & ATTACHMENTS

ORDER CODE	DESCRIPTION
NBRKT/LUMAFIX/PK4	LUMAFIX BRACKETS - PACK OF 4
NIL/DS/24	ILLINOIS DIFFUSER SHEET
NIL/RR/24	ILLINOIS/IOWA REAR REFLECTOR