


IOWA (IA)



Single-lamp version



Twin-lamp version

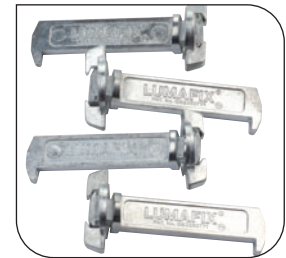

Lumafix Brackets - pack of 4



Recessed modular for T5 and PLL lamps, direct/indirect, with louvre.

APPLICATIONS

- Offices and conference rooms
- Reception areas

SPECIFICATION


- For T5 and PLL lamps.
- Supplied excluding lamps
- European brand ENEC control gear
- For 15-24mm exposed T ceilings and some pull-up installations

CONSTRUCTION

- Robust steel body
- White semi-gloss powder coated finish
- Semi-specular double parabolic louvre
- Louvre retained on shoot bolts for easy lamp changing

OPTIONS

- **Emergency.** Maintained 3 hours available on all versions. Add suffix M3.
- **Dimming.** Add suffix 1-10, DSI, DA, SD or CF as required.
- **Pull-up installation.** For installation in 15-24mm exposed T ceilings. For plasterboard and other pull-up installations packs of 4 lumafix brackets are available as separate items.

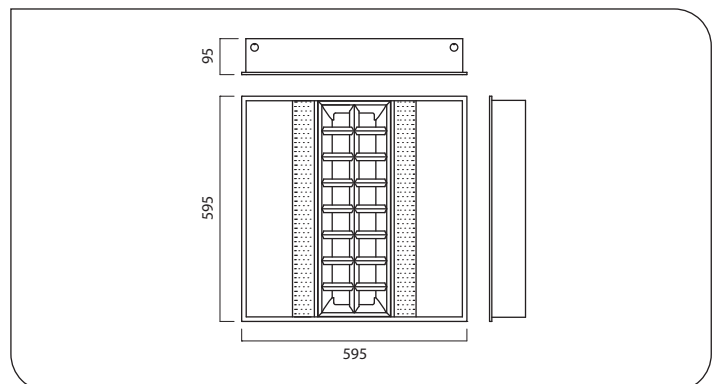

ORDER CODE	DESCRIPTION
NIA314/T5	IOWA 3X14WT5 REC MOD
NIA414/T5	IOWA 4X14WT5 REC MOD
NIA124/T5	IOWA 1X24WT5 REC MOD
NIA224/T5	IOWA 2X24WT5 REC MOD
NIA324/T5	IOWA 3X24WT5 REC MOD
NIA424/T5	IOWA 4X24WT5 REC MOD
NIA140/PLL	IOWA 1X40WPLL REC MOD
NIA240/PLL	IOWA 2X40WPLL REC MOD
NIA155/PLL	IOWA 1X55WPLL REC MOD
NIA255/PLL	IOWA 2X55WPLL REC MOD

SPARES & ATTACHMENTS

ORDER CODE	DESCRIPTION
NBRKT/LUMAFIX/PK4	LUMAFIX BRACKETS - PACK OF 4
NIA/DS/24	IOWA DIFFUSER SHEET
NIL/RR/24	ILLINOIS/IOWA REAR REFLECTOR