

# 3, 4, 5 & 6-Core Pre-wired Luminaire Leads


To save valuable time on site flex7 plugs can be pre-wired with a range of PVC or LS0H flexible cables. Once the connection to the luminaire has been made, simply plug into any suitably supplied flex7 outlet - typically:

**3-core**

**3-Core Pre-wired Lead**  
For non-dimmable luminaires



White as standard

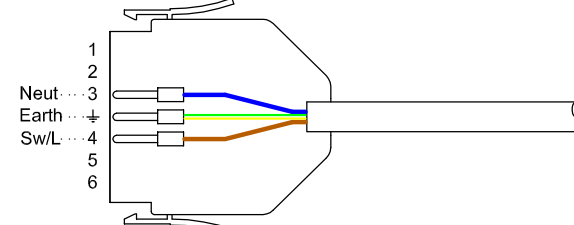

**4-core**

**4-Core Pre-wired Lead**  
For non-dimmable emergency luminaires



Red as standard



**5-core**

**5-Core Pre-wired Lead**  
For dimmable luminaires




Black as standard




**6-core**


**6-Core Pre-wired Lead**  
For dimmable emergency luminaires



Red as standard

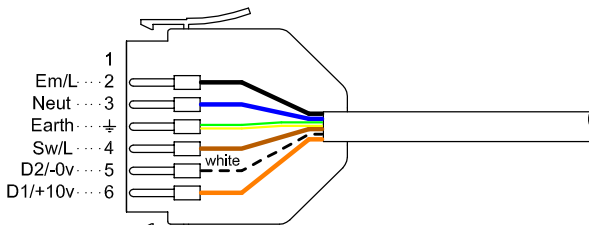

Note: Ordinarily, plugs used in the manufacture of pre-wired leads are only fitted with sufficient pins to suit the lead\*

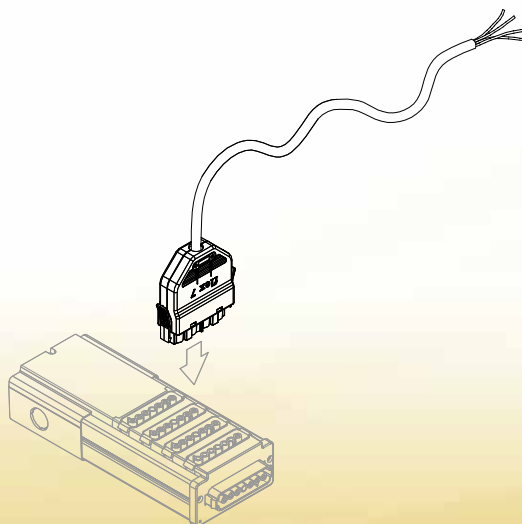

## Ordering flex7 3, 4, 5 & 6-Core Pre-wired Luminaire Leads

75	0.75mm <sup>2</sup>
100	1.00mm <sup>2</sup>
150	1.50mm <sup>2</sup>
(1.50mm <sup>2</sup> is only available in LS0H)	

pvc	PVC cable
lsf	LS0H cable

5 & 6-core only available in LS0H

1, 2, 3, 4, 5
(length in metres)

Non-associative colours or other cable lengths may be available to special order.

3-core	f13	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	/w (white plug)
4-core	f14	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	/r (red plug)
5-core	f15	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	/b (black plug)
6-core	f16	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	/r (red plug)

\*If 7-pin plugs are required suffix the colour with 7 for example, instead of /w use /w7 (only available in LS0H cable)